

FOR NEW EQUIPMENT SALES, CALL 1.300.1ALTEC
TO SPEAK WITH AN ALTEC REPRESENTATIVE or visit us colling at alteraus company




FEATURES

- Altec ISO-Grip® Single Hand Control
- Insulation per AS1418.10 2011, 66kV (ext.)/66kV Dry & 33kV/33kV Wet
- Compensated Articulating Arm
- Fiberglass Upper Boom and Lower Boom Insulator
- Hydraulic Boom Extension
- 2-Person Bucket with 300 kg Capacity
- Hydraulic 180° Bucket Rotation with Bucket Tilt
- Full-Pressure, Open-Center Hydraulic System
- Outrigger Motion Alarm and Outrigger Interlocks
- Fiber Optic Emergency Stop Valves at all Upper and Lower Control Stations
- Tool Circuit at Bucket
- Secondary Stowage System
- Engine Start/Stop

OPTIONS

- Altec Load Management System
- Altec Virtual Wall System with Short Jacking
- Bucket Lighting System
- Smaller Bucket 610 x 1,219 mm
- Tool Circuit Below Rotation
- A-Frame or Out and Down Front Outriggers
- Bucket Covers

REACH DIAGRAM

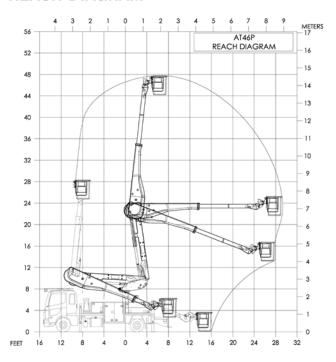

SNO1	Ground to Bottom of Bucket	13.9 m
	Working Height	15.4 m
	Maximum Side Reach (at Bucket Height)	9.1 m
	Stowed Travel Height*	3.5 m
	Upper Boom Isolation Gap	1,016 mm
CAT	Articulating Arm Isolation Gap	483 mm
SPECIFICATIONS	Bucket Capacity	300 kg
	Bucket Dimensions	762 x 1,219 mm
	Lower Boom Articulation	-25 to 85°
	Articulating Arm Articulation	-3 to 82°
	Rotation	Continuous
	*Based on a 1 meter chassis frame height.	

2-PERSON BUCKET



LOAD MANAGEMENT



VIRTUAL WALL



ISO-GRIP® CONTROL & BUCKET LIGHTING SYSTEM



For more complete information on Altec products and services, visit us on the web at www.altec.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec[®] and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission.

© 2021 Altec Inc. All Rights Reserved. AUOSAT46P-0421 v2